

Industrial Manipulators





While the manipulator arm is stocked on the shelf, the end effector must be custom-designed for the part to be lifted.

However, we mass-manufacture and stock end effector

components, such as handlebars, grippers, bearing assemblies, and rotation units, all of which have been previously researched and tested

Industrial manipulators are pneumatically-balanced manual lift assists. They allow an operator to lift and position a part as if it were an extension of his/her hands.

Manipulators are the high-speed, high-performance manual material-handling solution.

Manipulators render the load virtually weightless from the point of view of the operator. Normally, there are no up/down pushbuttons. The operator can concentrate on moving the load quickly without pressing buttons.

Unlike a crane, a manipulator is able to support a load that is offset from the axis of the end effector.

End Effectors

No manipulator is complete without an end effector. The end effector consists of handlebars, gripper and rotation components. The cost of the end effector is roughly equal to the cost of the manipulator arm.



Manipulators....

- Can reach into enclosed spaces (such as a vehicle)
- · Can reach under obstructions
- Offer greater placement precision than is possible with a crane
- Generally offer faster cycle times than cranes








Manipulator Models -

There are 6 basic models of manipulator, named by the moment capacity at Axis 1 (the "shoulder").

| | | Typical Application, not Definitive | | |
|----------------------|------------------------------|-------------------------------------|-----------------------------------|--|
| Manipulator Model | Maximum Moment Axis #1 | Payload (End Effector + Part) | Reach (Axis #1 to mEE+PART) | |
| TA5 | 15000 in*lbs | 120 lbs | 6-8 ft | |
| M25 | 25000 in*lbs | 150 lbs | 8-10 ft | |
| M35 | 35000 in*lbs | 150 lbs | 9-11 ft | |
| M60 | 60000 in*lbs | 330 lbs | 9-11 ft | |
| M120 | 120000 in*lbs | 770 lbs | 10-12 ft | |
| M200 | 200000 in*lbs | 1200 lbs | 11-14 ft | |

| The lengths for Arm 1 and Arm2 increase in increments of 10". | | | | |
|---|--|--|--|--|
| Both arms are typically available on-the-shelf in sizes: | | | | |
| 50" | | | | |
| 60" | | | | |
| 70" | | | | |
| 80" | | | | |
| 90" | | | | |

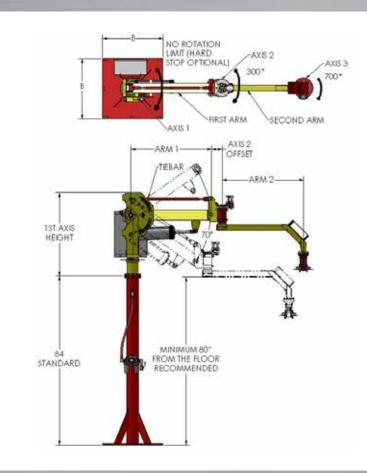

| Mode | el | Baseplate Size 'B' | 1st Axis Height | Axis 2 Offset |
|-------|-----|--------------------|-----------------|---------------|
| TA5 | | 20" x 20" | NA | 4.125" |
| M25/N | 135 | 30" x 30" | 41" | 5" |
| M60 |) | 38" x 38" | 42" | 5.25" |
| M12 | 0 | 48" x 48" | 43" | 7.375" |
| M20 | 0 | 48" x 48" | 43" | 8.25" |



Roll-handler end effector above, with roll mandrel, 90 degree rotate, and vertically sliding handlebars. Controls are 100% pneumatic.

Manipulator Models Photos -













AutoBalance

Manipulators have offered the fastest, smoothest material-handling solution available. But traditionally, they are only able to balance one or two weights without changing settings. AutoBalance (patented) is a feature that solves this problem by automatically "memorizing" the weight while lifting the load. It is all-pneumatic. AutoBalance is a revolutionary technological advance in manipulator control that automatically balances a succession of loads of unknown weights. The operator has no up/down pushbuttons; as the handlebars are pulled up and down, the balance point rises and falls on-the-fly!



AutoBalance also has the effect of assisting the operator in overcoming the inertia of the load and the arm. In the largest manipulators, the M120 and M200, AutoBalance is routinely added even if there is only one load.

Manipulators at Work









Brake Press Manipulators





The Brake Press Manipulator uses a very specialized end effector (patented), that can follow the movement of a plate or sheet that is being formed in a brake press. As the ram descends, the plate rises through an angle while the grippers passively comply with the travel. The brake press manipulator allows a single operator to perform operations that would normally require 2 workers. Typically the sheet is turned over 180 degrees in the process of forming.


Specially-mounted Manipulators









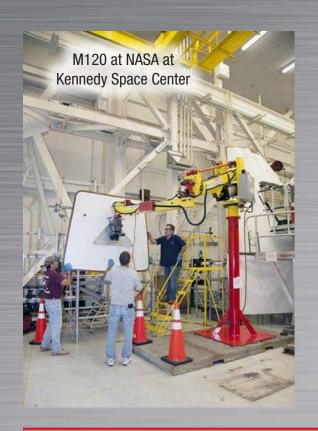



Givens Engineering, established in 1993, provides manipulators, cranes and custom machinery to a wide range of customers in the United States, Canada and beyond.

Almost everything we manufacture is customized and engineered to some extent.

We employ engineers (mechanical and electrical), designers, machinists, millwrights, welders, electricians and controls specialists to manufacture cranes, manipulators, grippers and end effectors entirely in-house.

Installation, startup support, maintenance and annual inspections are services that we routinely provide.

We have supplied equipment to these large organizations:

Toyota, Honda, GM, Stellantis, Lockheed-Martin, Magna, International Truck, Hino Truck, GE, Volvo, Nissan, NASA, ZF, Dana, ATS, Bombardier, Blue Origin, and many others







327 Sovereign Rd, London, ON N6M 1A6 519-453-9008



26437 Southpoint Rd, Perrysburg, Ohio 43551 419-724-9001